


CONTACT RESISTANCE: 20m OHMS MAX. AT  
DC 100mA  
INSULATOR RESISTANCE: 1000M OHMS MIN.  
AT DC 500V  
CURRENT RATING: 1 AMP

DIELECTRIC WITHSTANDING  
VOLTAGE: AC 500V FOR 1 MINUTE  
OPERATING TEMPERATURE: -55°C-+105°C  
CONTACT: PHOSPHOR BRANZE  
HOUSING: L.C.P.(Black Color)

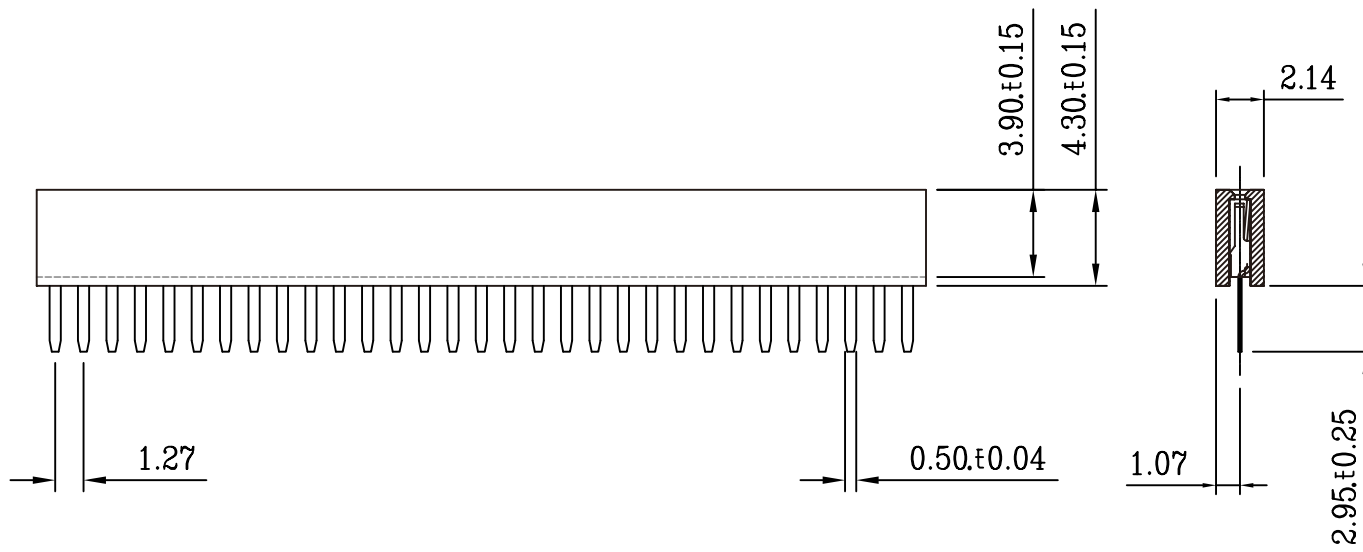


RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

YA-D43-1Xxx-LF  
SERIES | LEADFREE  
1X02:02 WAY  
1X50:100 WAY  
HIGH 4.3mm  
DIP 180°

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

DESCRIPTION: 1.27mm Dip Socket  
(Straight/Base:4.3mm)